



AMENDMENT
Reference # 1

ORIGINAL DOCUMENT TITLE: Invitation to Tender for Supply and Installation
Culverts – Harbour Drive, Dunville
Tender # 2022-10-03-001

DATE OF ISSUE: Issued October 5, 2022
SUBMISSION DEADLINE: Closes October 19, 2022 2:00 PM

CHANGE #1 - TO BE IMPLEMENTED

Page 15 Sentence 1 Reads “supply and installation of fourteen (14) – 24” plastic culverts.....” **Is hereby replaced with** “....supply and installation of thirteen (13) – 24” plastic culverts....”

CHANGE # 2 – TO BE IMPLEMENTED

Contractor must add armour stone on the waterfront side for erosion protection.
See detailed drawing – Appendix A attached.

Also, some areas may require sewerage outfall to be extended within 10m of the culvert replacement. Sewer outfall must extend beyond the low tide mark. Contractor must ensure that backfilling material does not damage any of the outfalls and must be large enough to prevent washout.



NOTE: Site visit is recommended to discuss particulars for each culvert.

APPENDIX A

**In House
Concept Drawing**

**Harbour Drive Culvert Replacement
&
Upgrades**

APPENDIX A Harbour Drive Repairs + upgrades

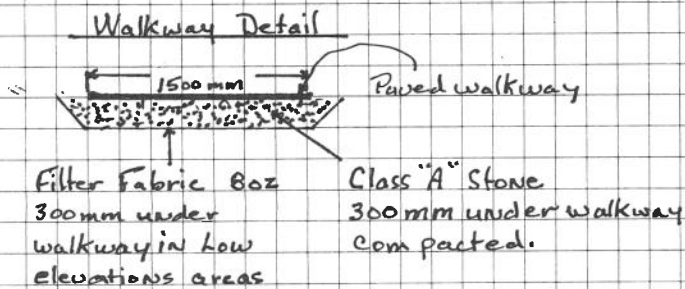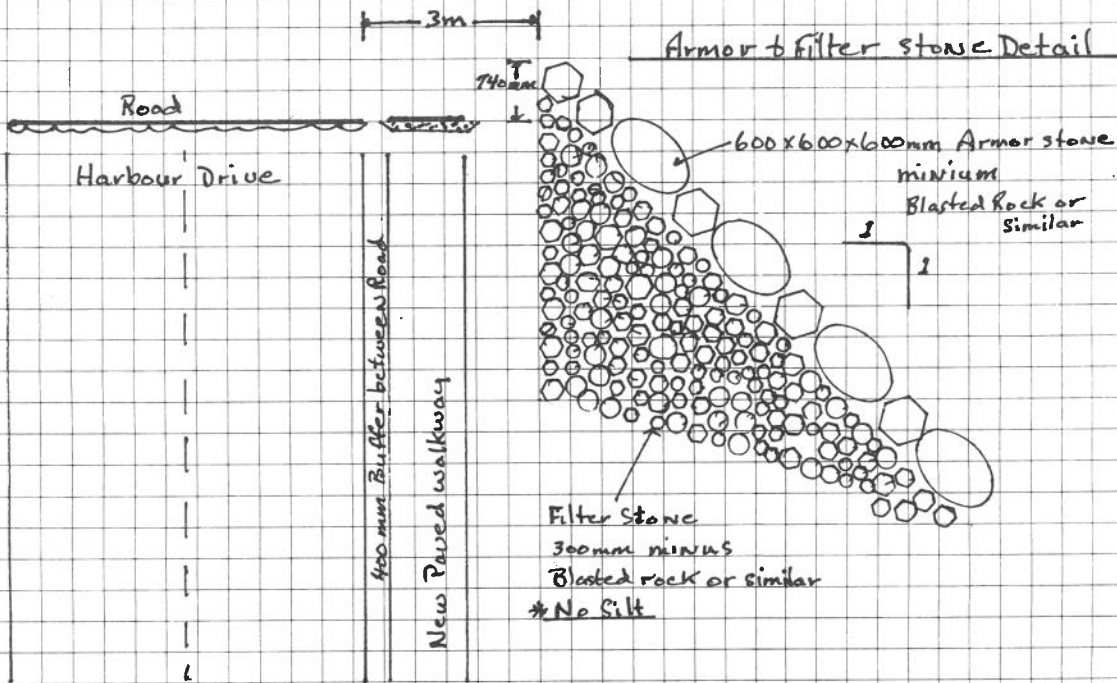

Notes:

1. Distance from road to armor stone will be 3m
2. Paved walkway will be 1.5m wide
3. Class "A" stone under walkway will be 300mm compacted before paving
4. Filter fabric under Class "A" stone 220m x 1.0m in Low elevation area
5. All sewer (private) 4" PVC will be extended beyond foot of Armor Stone
6. All culverts will be extended beyond foot of Armor Stone
7. All culverts/sewer lines will be noted on drawings
8. Armor & filter stone will extend 740mm above walkway/road.

Quantities:

1. Armor Stone = 900 m³
2. Filter Stone = 3000 m³
3. Pavement = 2250 m²
4. Class "A" stone = 900 m³
5. Culverts
-